

SPA CONTROL ICONS

AC AC Air Controls

WD 2WD.....2 Way Diverter

NJNeck Jets

O/O ON/OFFWater Feature

Z# (S) Zone


P1 (P1) Pump 1

P2 (P2) Pump 2

P3 (P3)-----PUMP 3



SPA CONTROLS ... 30TH BENCH

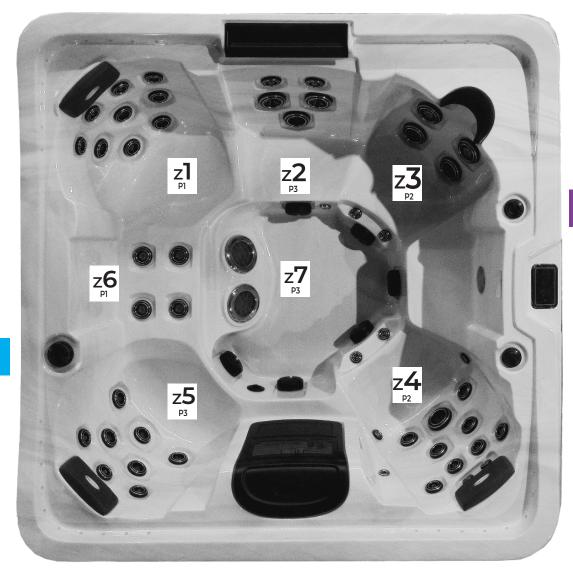



O/O WF

Operation Notes: 30TH ANIVERSARY BENCH

*DO NOT TURN 2-WAY DIVERTER VALVES WHILE RELATED PUMP IS OPERATING.

2WD

NOTE: MOST JETS CAN BE OPENED OR CLOSED BY TURNING THEM.

HELPFUL TIPS

Suction outlet components have a finite life. The cover/grate should be inspected frequently and replace at least every seven years, or if found to be damaged, broken, cracked, missing, or not securely attached.